

FIG. 1

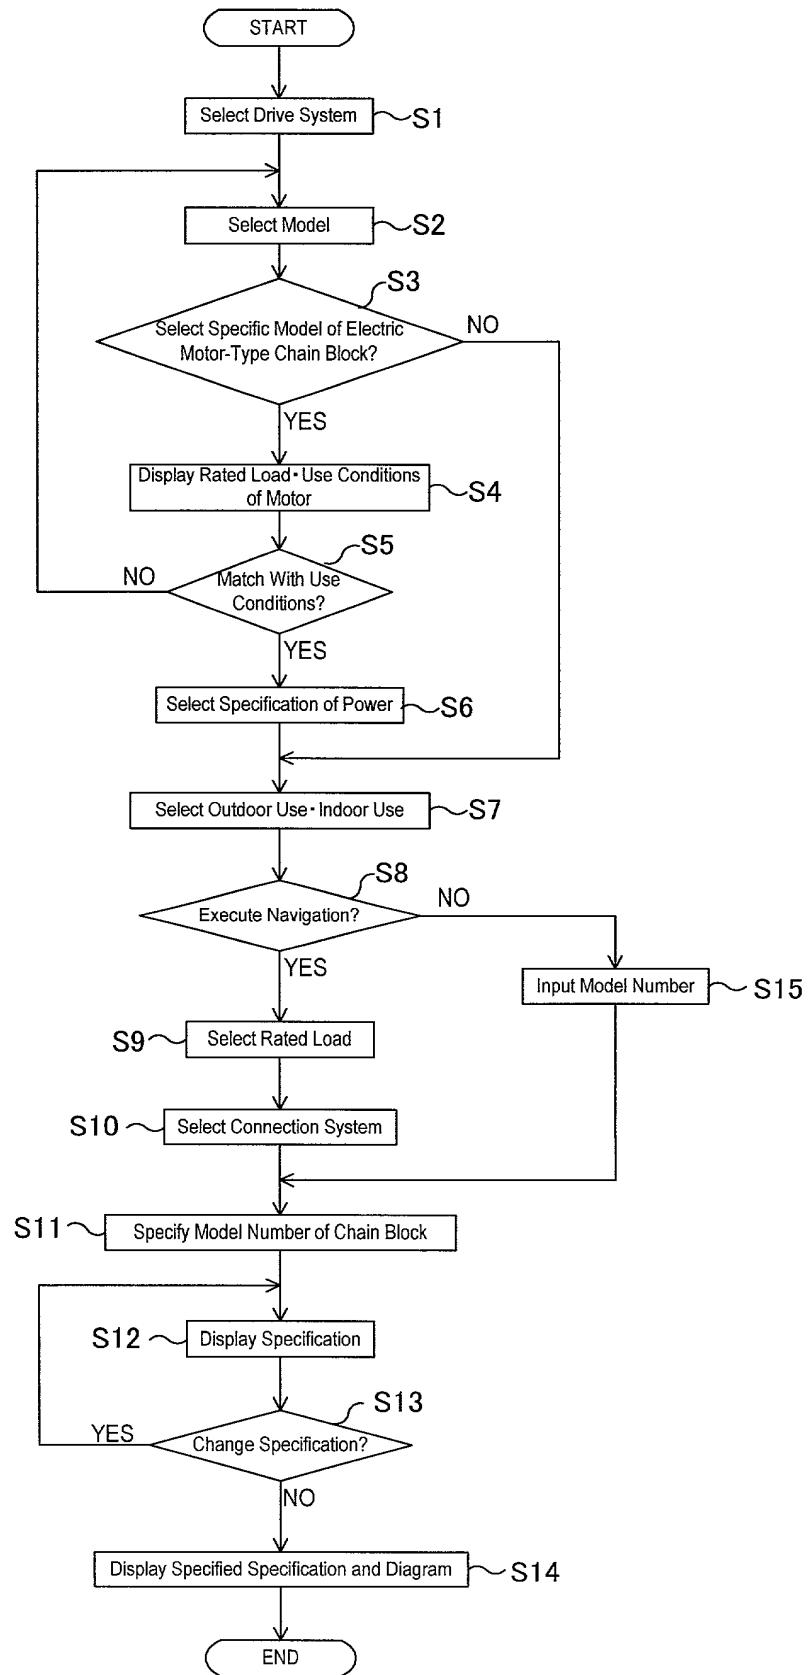


FIG.2

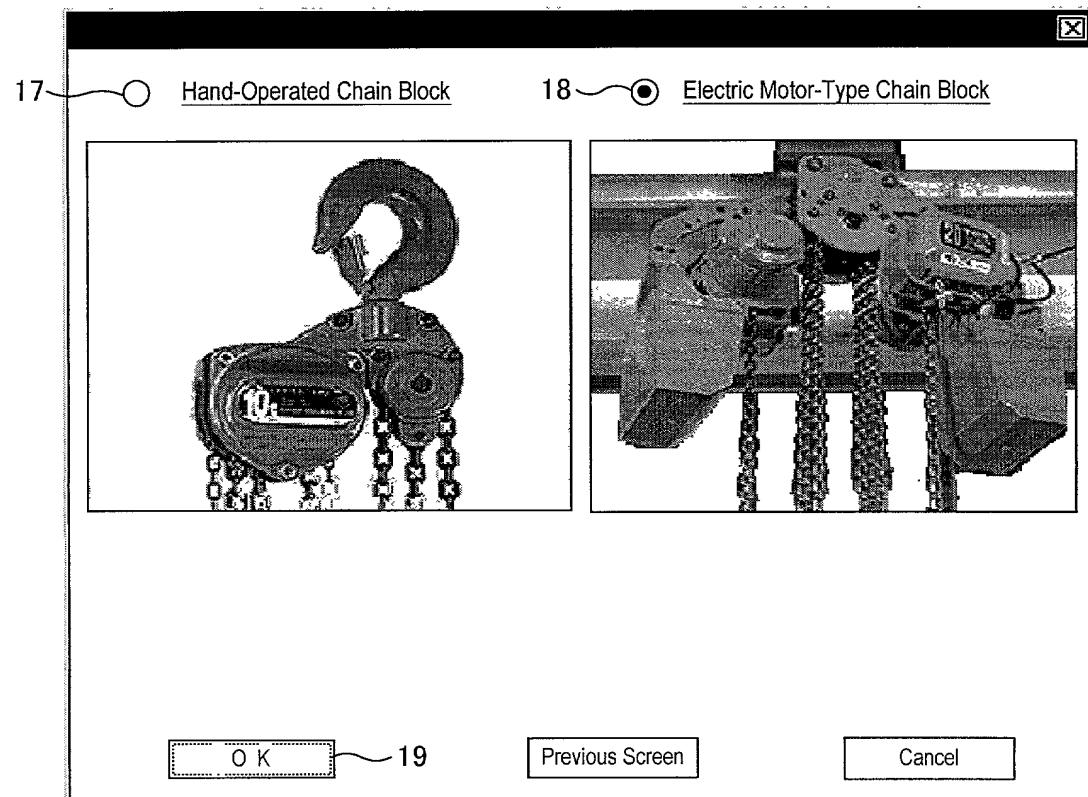


FIG. 3

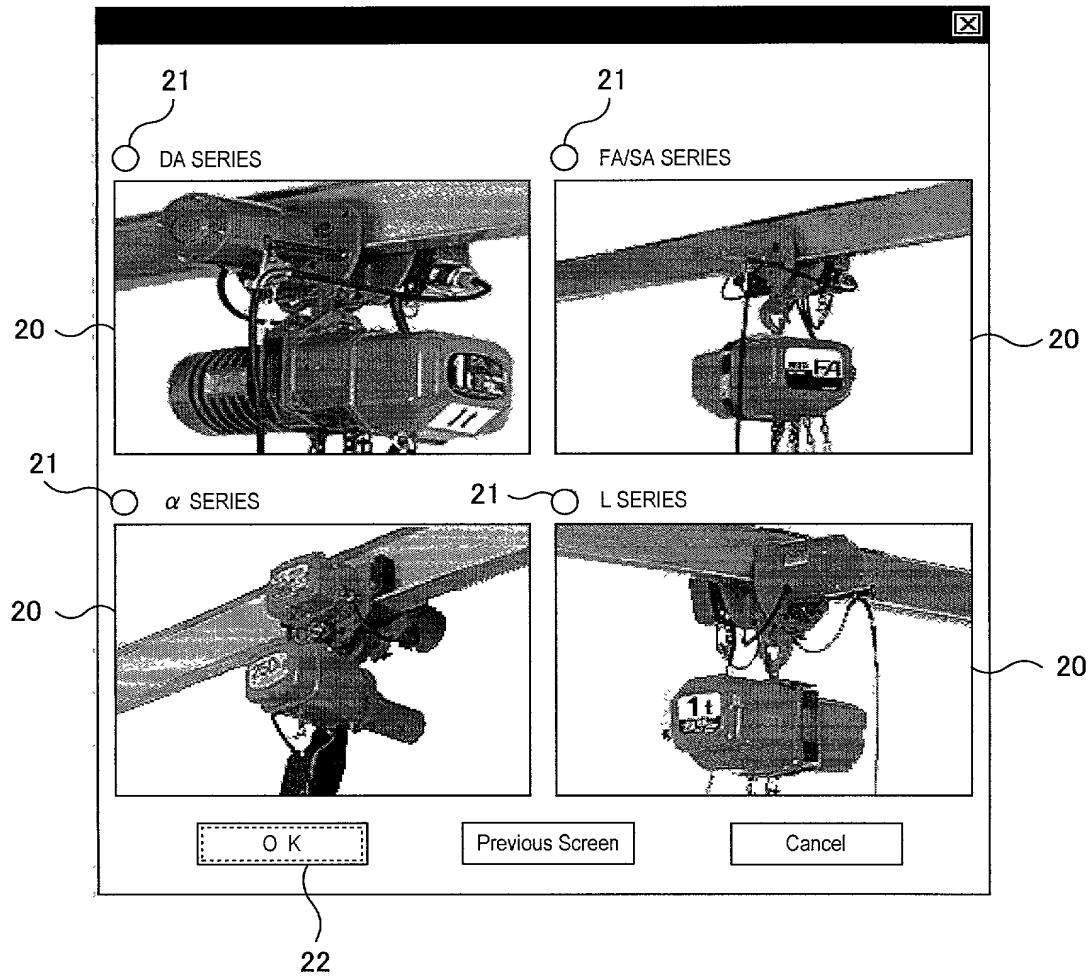


FIG.4

Selected Model	DA SERIES					
ED Percent (%ED)	40%					
Maximum Use and Number of Starts per Hour (number of times/h)	240 times					
Used Range						
Classification of Load	Averaged Operating Hours per Day (Hr)					
	-0.5	-1	-2	-4	-8	
Light	M1	M2	M3	M4	M5	Usually used within about 1/3 of a load but rarely used under a rated load
Middle	M2	M3	M4	M5	M6	Usually used within about 1/3 to about 2/3 of a load, but sometimes used under a rated load
Heavy	M3	M4	M5	M6		Usually used under 2/3 or more of a load but often used under a rated load
Enormously Heavy	M4	M5	M6			Usually used under a rated load or a load close to it
<p>Selected model can be used under the condition specified above. If the used condition is beyond the condition specified above, then you must select a higher model.</p>						
SUITABILITY			51	52		
<input type="button" value="OK"/> <input type="button" value="Previous Screen"/> <input type="button" value="Cancel"/>						

FIG. 5

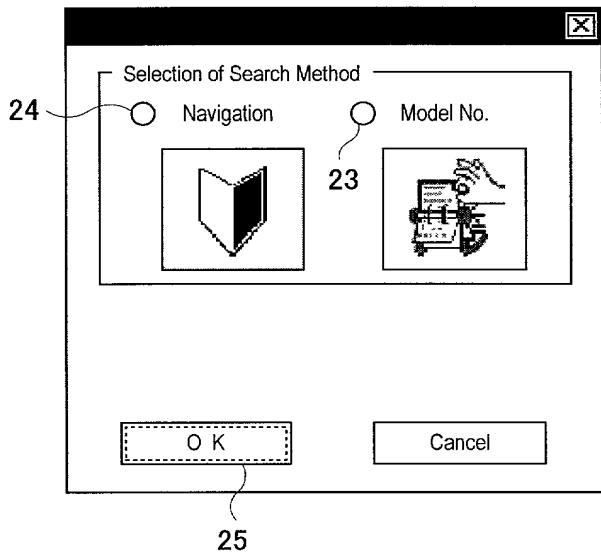


FIG. 6

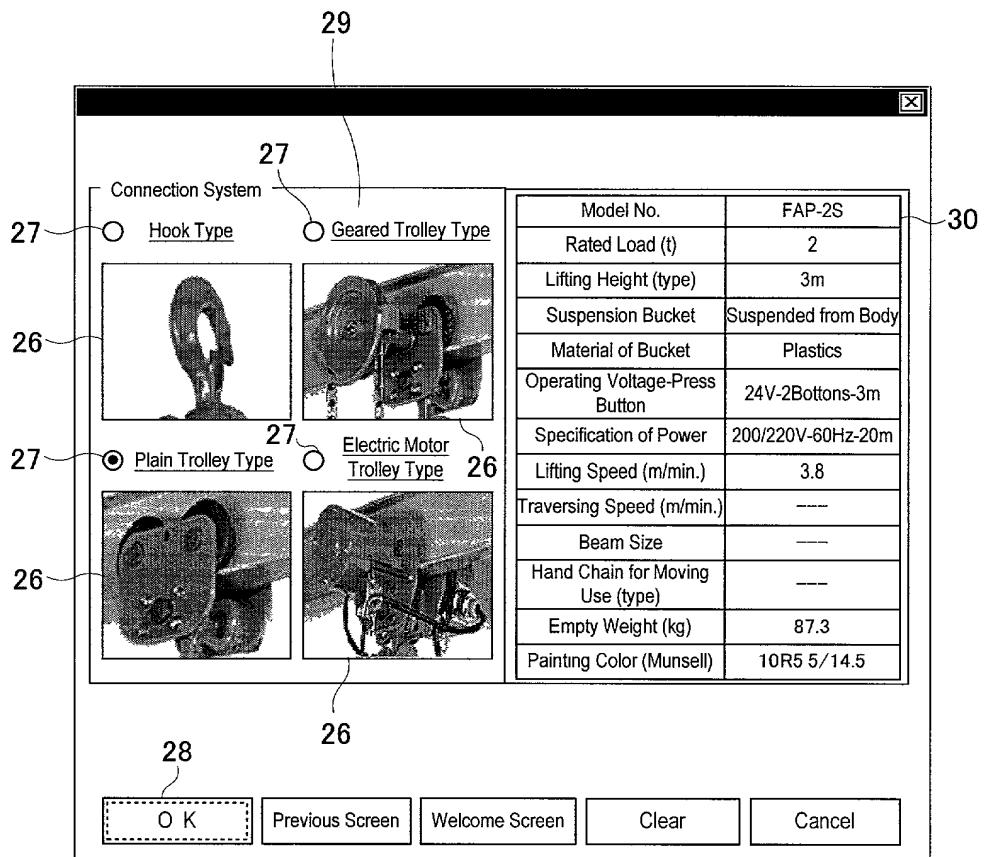


FIG.7

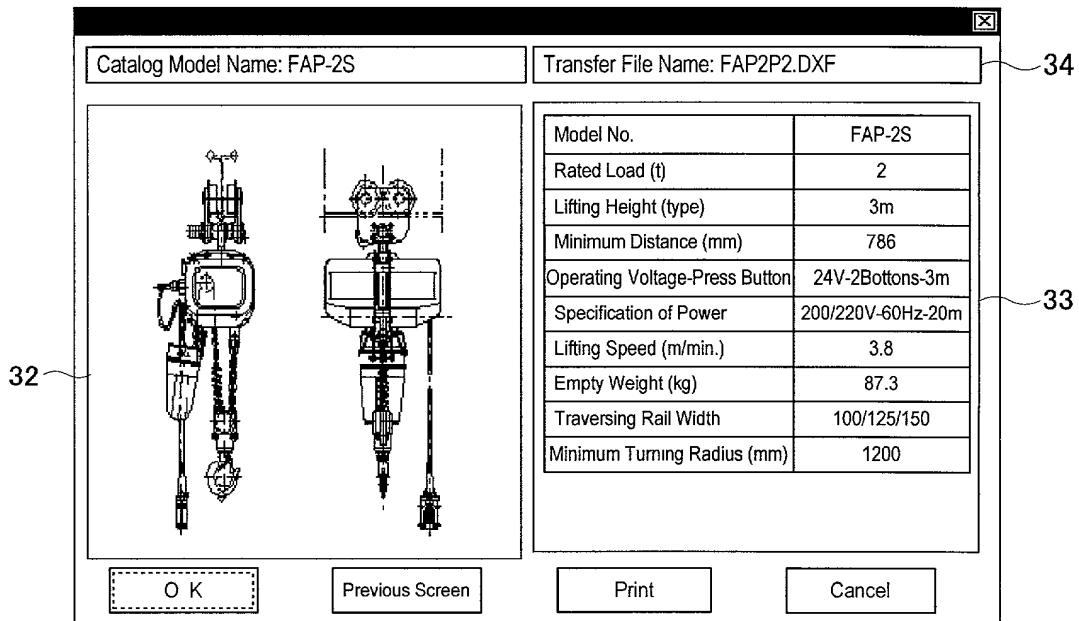


FIG.8

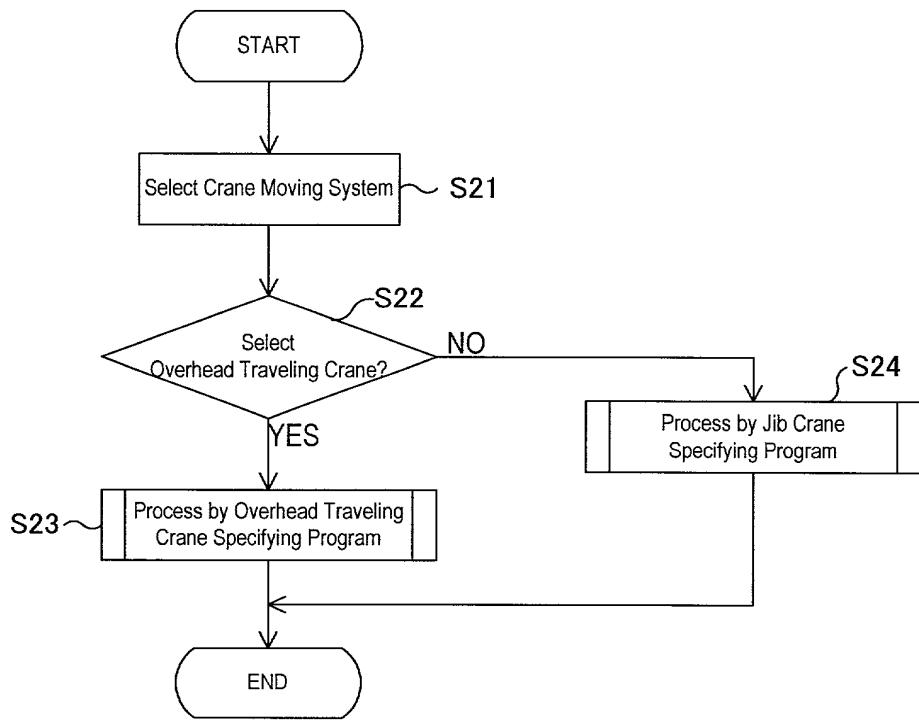


FIG. 9

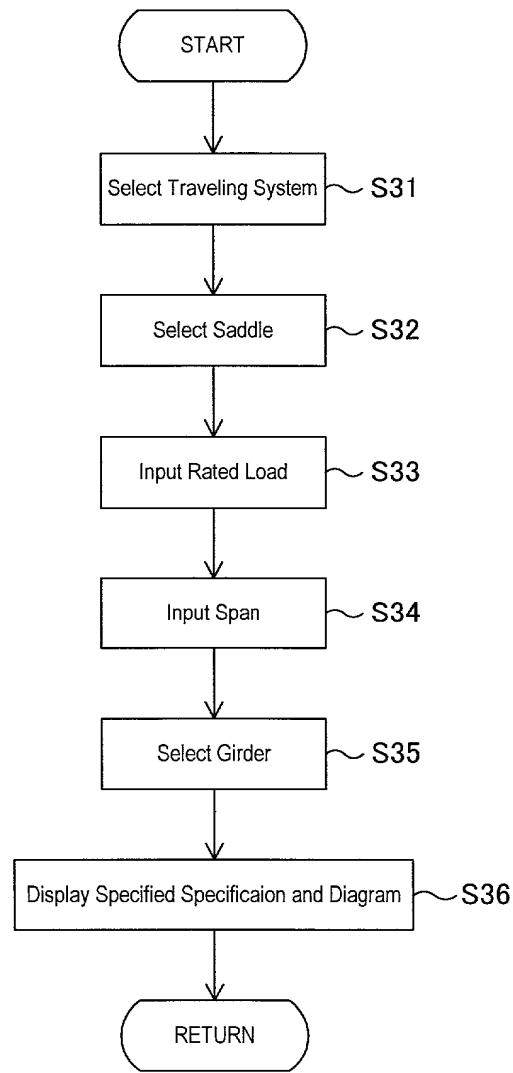


FIG. 10

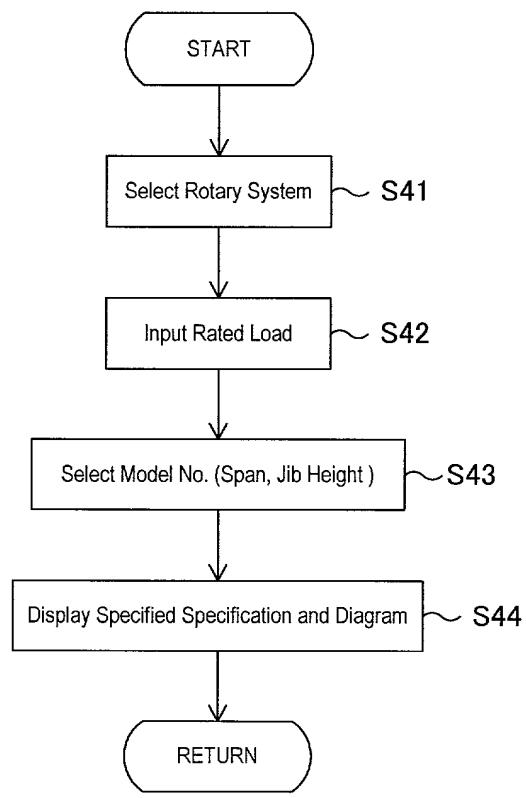


FIG. 11

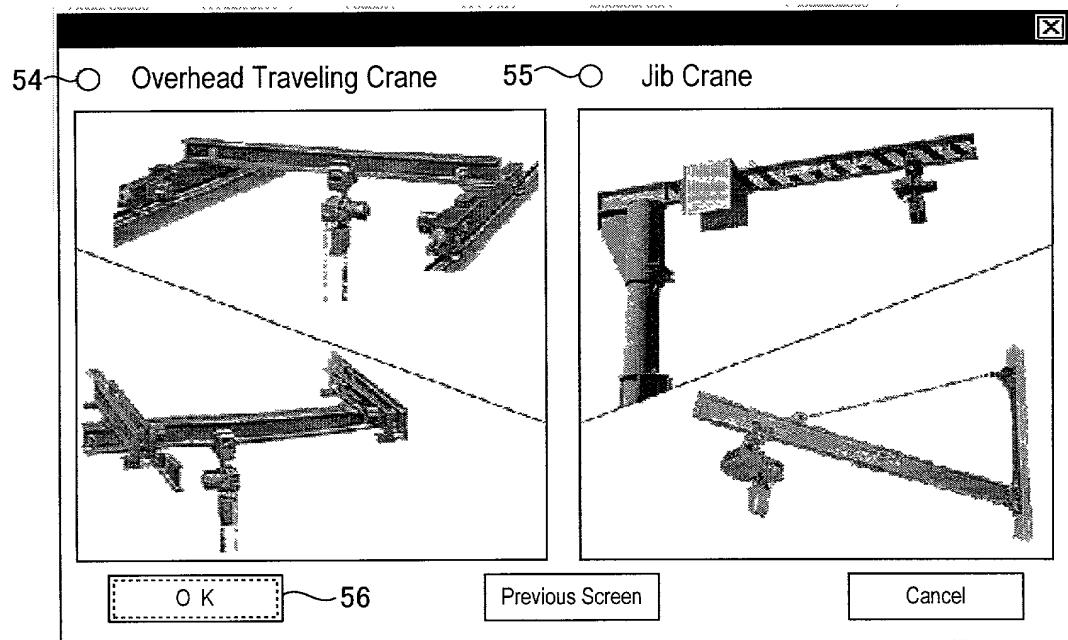


FIG. 12

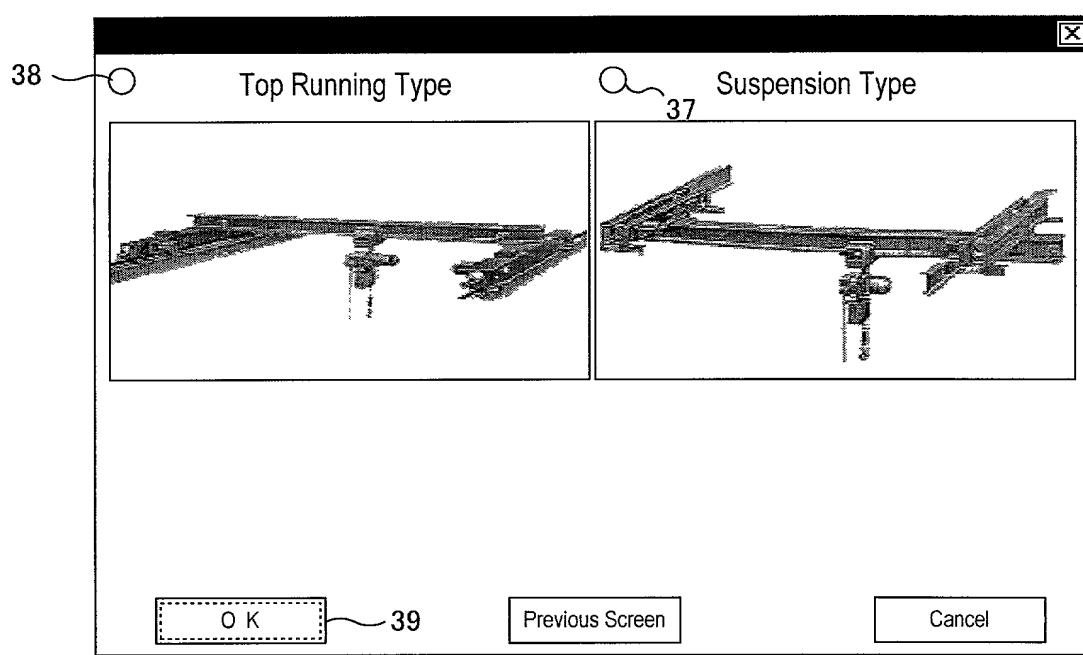


FIG. 13

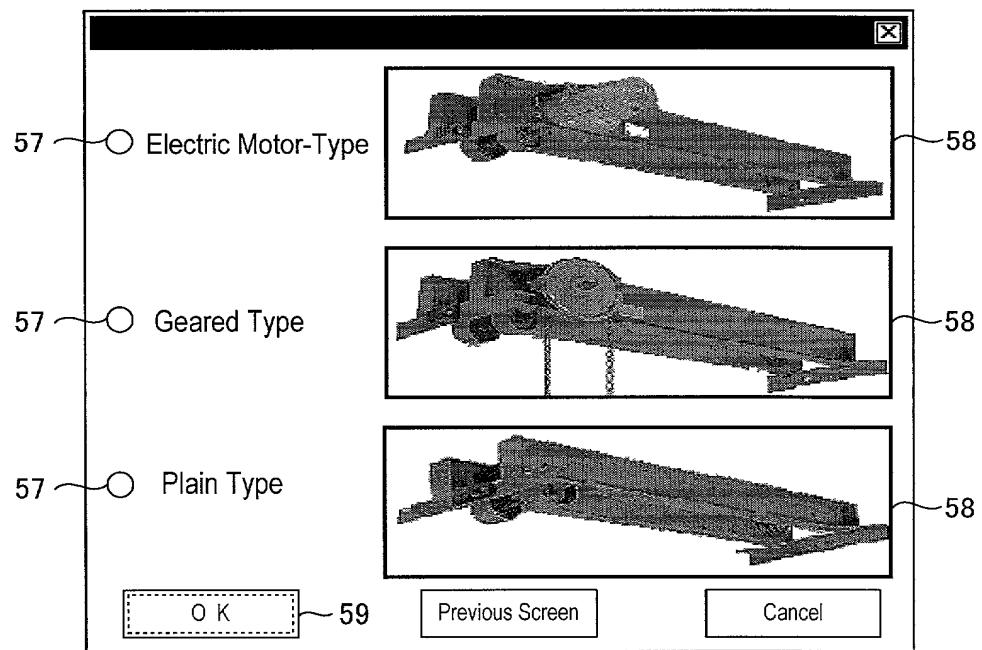


FIG. 14


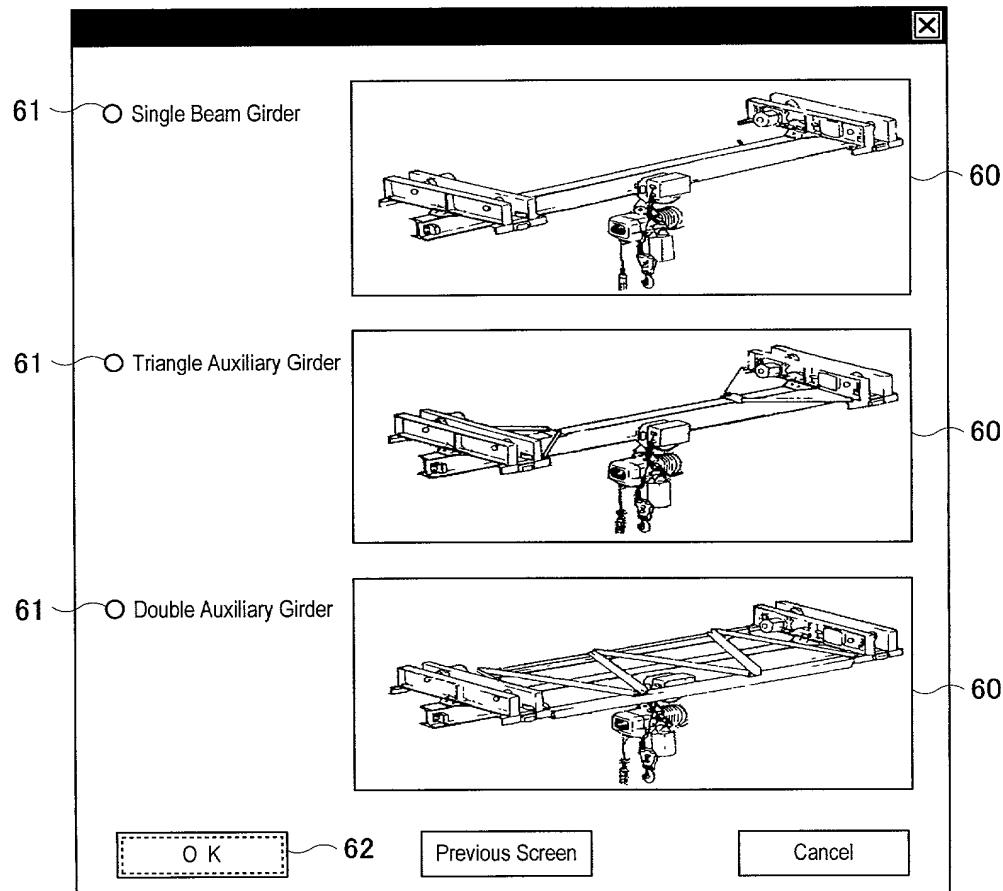


FIG. 15

63

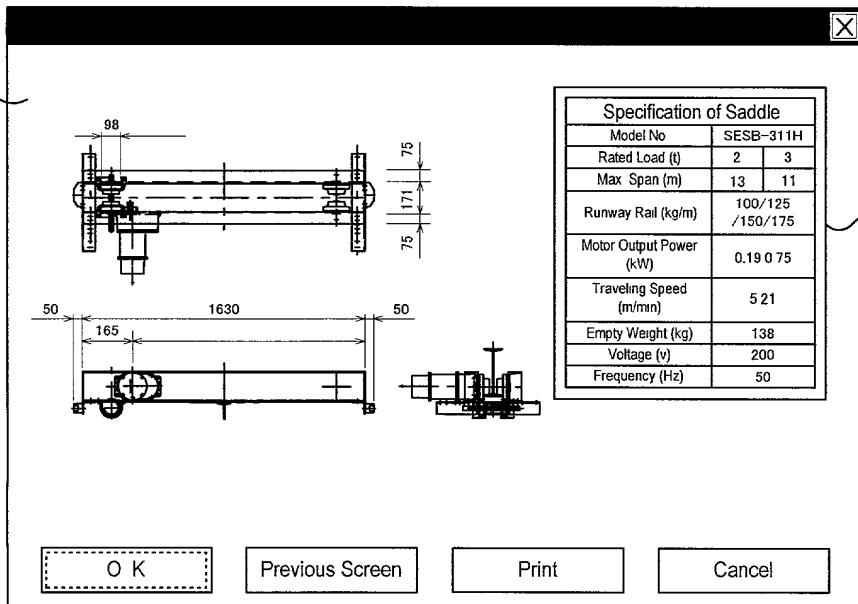

64

FIG. 16

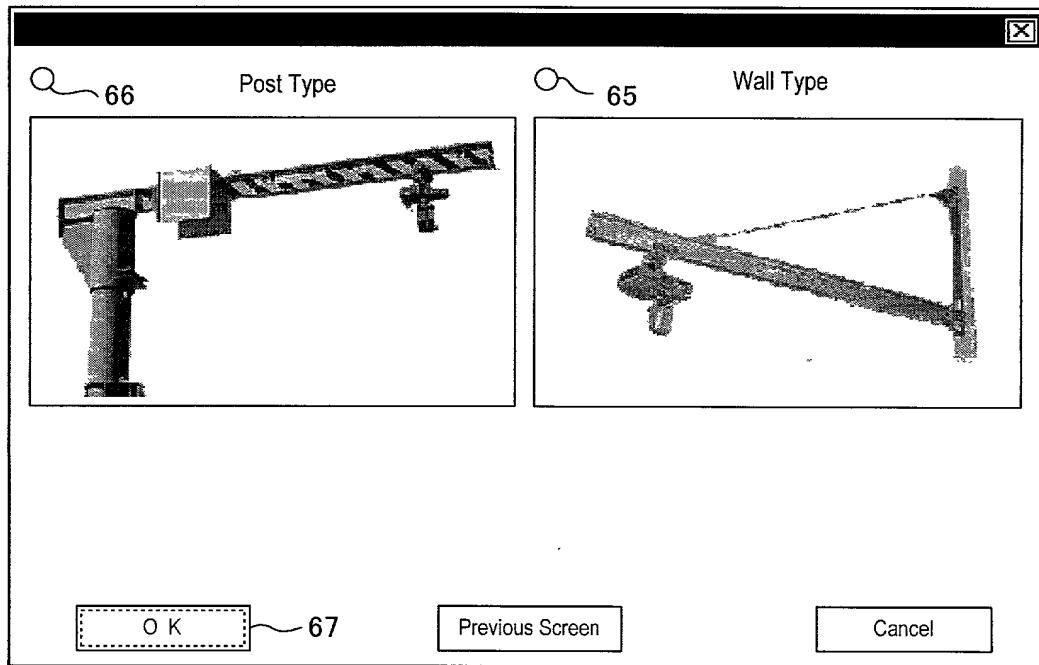


FIG. 17

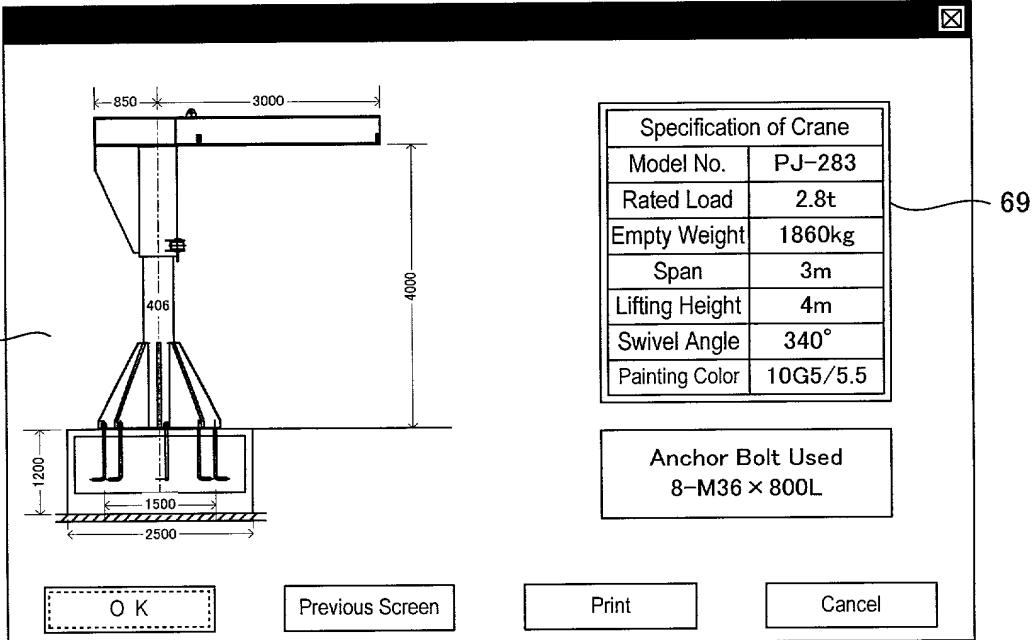


FIG. 18

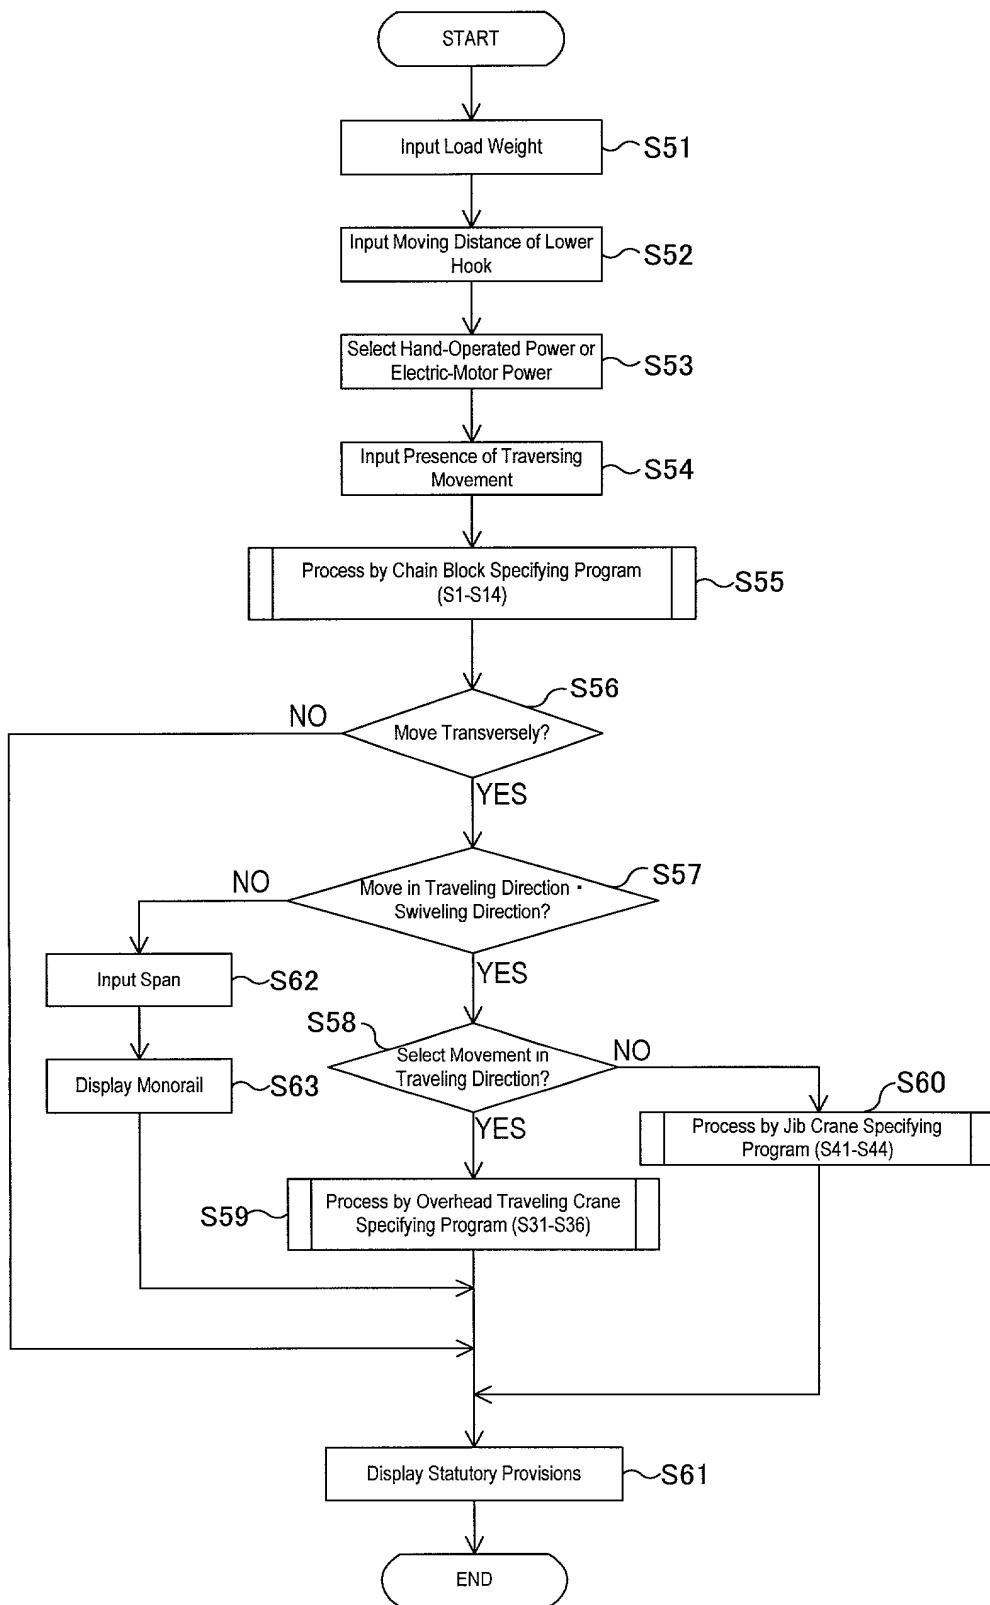


FIG. 19

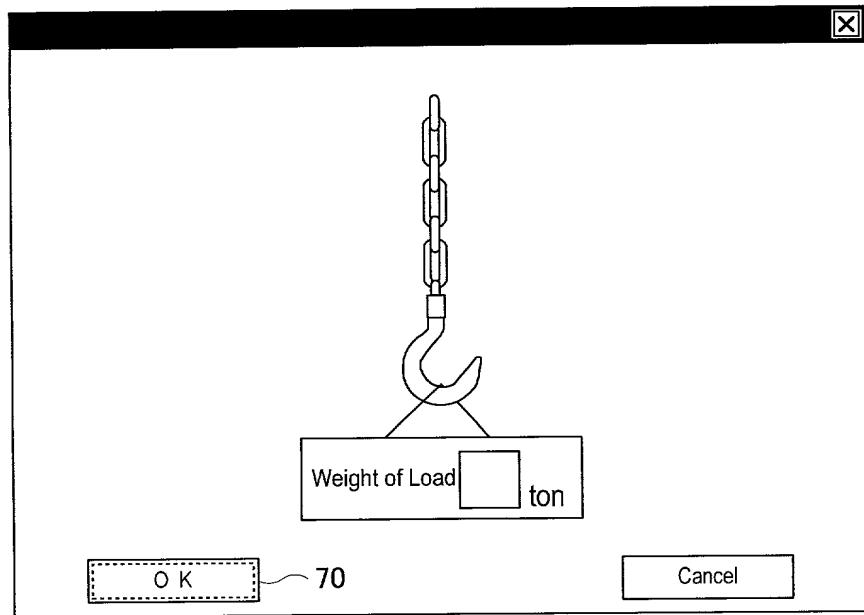


FIG. 20

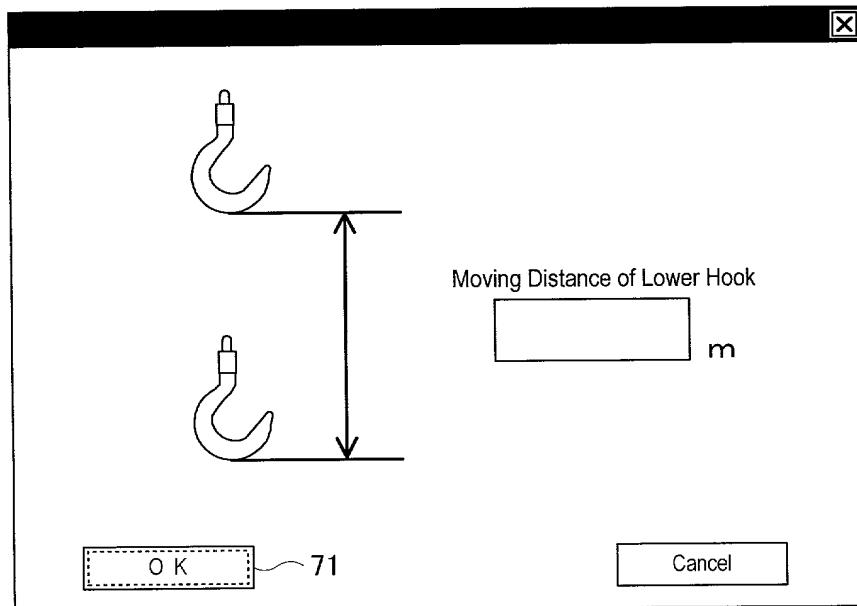


FIG. 21

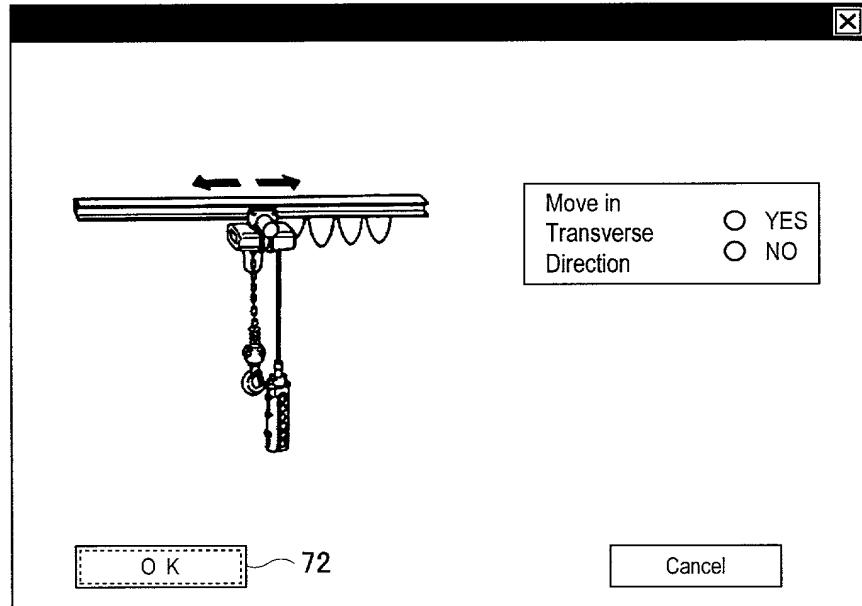


FIG. 22

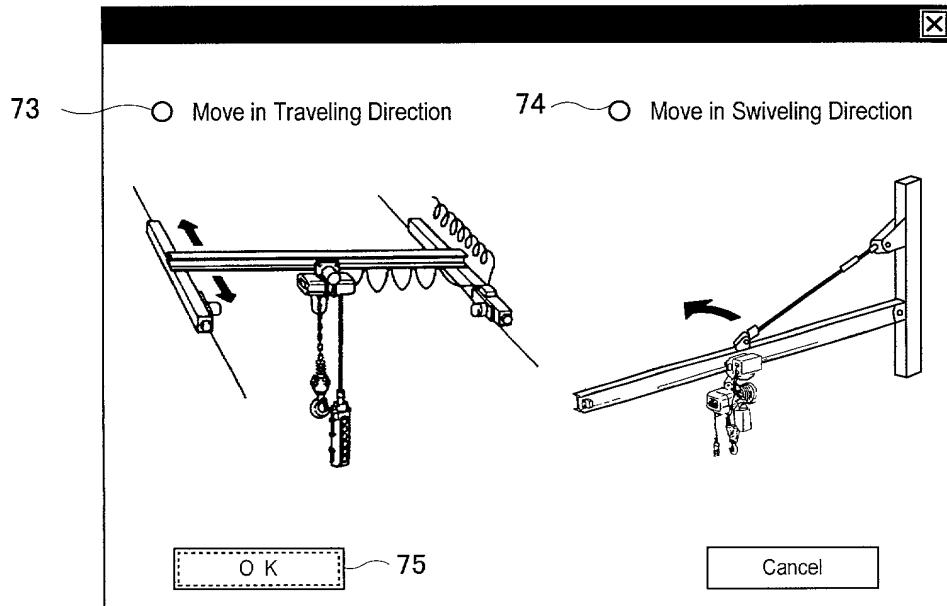


FIG. 23